

Dell™ VIS Creator
Release 2.2
Reference Architecture



Information in this publication is subject to change without notice.

© Dell Inc. 2012. All rights reserved. The copyright in the documentation is held by Dell or the original creator of the material.

Reproduction of these materials in any manner whatsoever without the written permission of Dell Inc. is strictly forbidden.

Trademarks used in this text: Dell^(TM), the Dell logo, Dell Precision^(TM), OptiPlex^(TM), Latitude^(TM), PowerEdge^(TM), PowerVault^(TM), PowerConnect^(TM), OpenManage^(TM), EqualLogic^(TM), Compellent^(TM), KACE^(TM), FlexAddress^(TM), Force10^(TM) and Vostro^(TM) are trademarks of Dell Inc. Intel^(R), Pentium^(R), Xeon^(R), Core^(R) and Celeron^(R) are registered trademarks of Intel Corporation in the U.S. and other countries. AMD^(R) is a registered trademark and AMD Opteron^(TM), AMD Phenom^(TM) and AMD Sempron^(TM) are trademarks of Advanced Micro Devices, Inc. Microsoft^(R), Windows^(R), Windows Server^(R), Internet Explorer^(R), MS-DOS^(R), Windows Vista^(R) and Active Directory^(R) are either trademarks or registered trademarks of Microsoft Corporation in the United States and/or other countries. Red Hat^(R) and Red Hat^(R)Enterprise Linux^(R) are registered trademarks of Red Hat, Inc. in the United States and/or other countries. Novell^(R) and SUSE^(R) are registered trademarks of Novell Inc. in the United States and other countries. Oracle^(R) is a registered trademark of Oracle Corporation and/or its affiliates. Citrix^(R), Xen^(R), XenServer^(R) and XenMotion^(R) are either registered trademarks or trademarks of Citrix Systems, Inc. in the United States and/or other countries. VMware^(R), Virtual SMP^(R), vMotion^(R), vCenter^(R) and vSphere^(R) are registered trademarks or trademarks of VMware, Inc. in the United States or other countries. IBM^(R) is a registered trademark of International Business Machines Corporation.

Other trademarks and trade names may be used in this publication to refer to either the entities claiming the marks and names or their products. Dell Inc. disclaims any proprietary interest in trademarks and trade names other than its own.

Notes, Cautions, and Warnings



NOTE: A NOTE indicates important information that helps you make better use of your computer.



CAUTION: A CAUTION indicates potential damage to hardware or loss of data if instructions are not followed.



WARNING: A WARNING indicates a potential for property damage, personal injury, or death.


Overview	1
VIS Creator Deployment Profiles	1
VIS Creator Machines	2
High Availability Configuration.....	2
Load Balancer Considerations	2
Initial Deployment Recommendations.....	3
Database Deployment.....	3
Portal Website Configuration.....	3
Data Collection Configuration.....	3
Distributed Execution Manager Configuration	4
Scalability Considerations	4
Portal Website Scalability	4
Data Collection Scalability	4
Workflow Processing Scalability.....	5

Overview

This document provides recommendations about deployment topology, hardware specifications, and scalability. For software requirements and supported platforms see the *VIS Creator Support Matrix*.

VIS Creator Deployment Profiles

The following diagram shows a typical deployment topology for a VIS Creator instance:

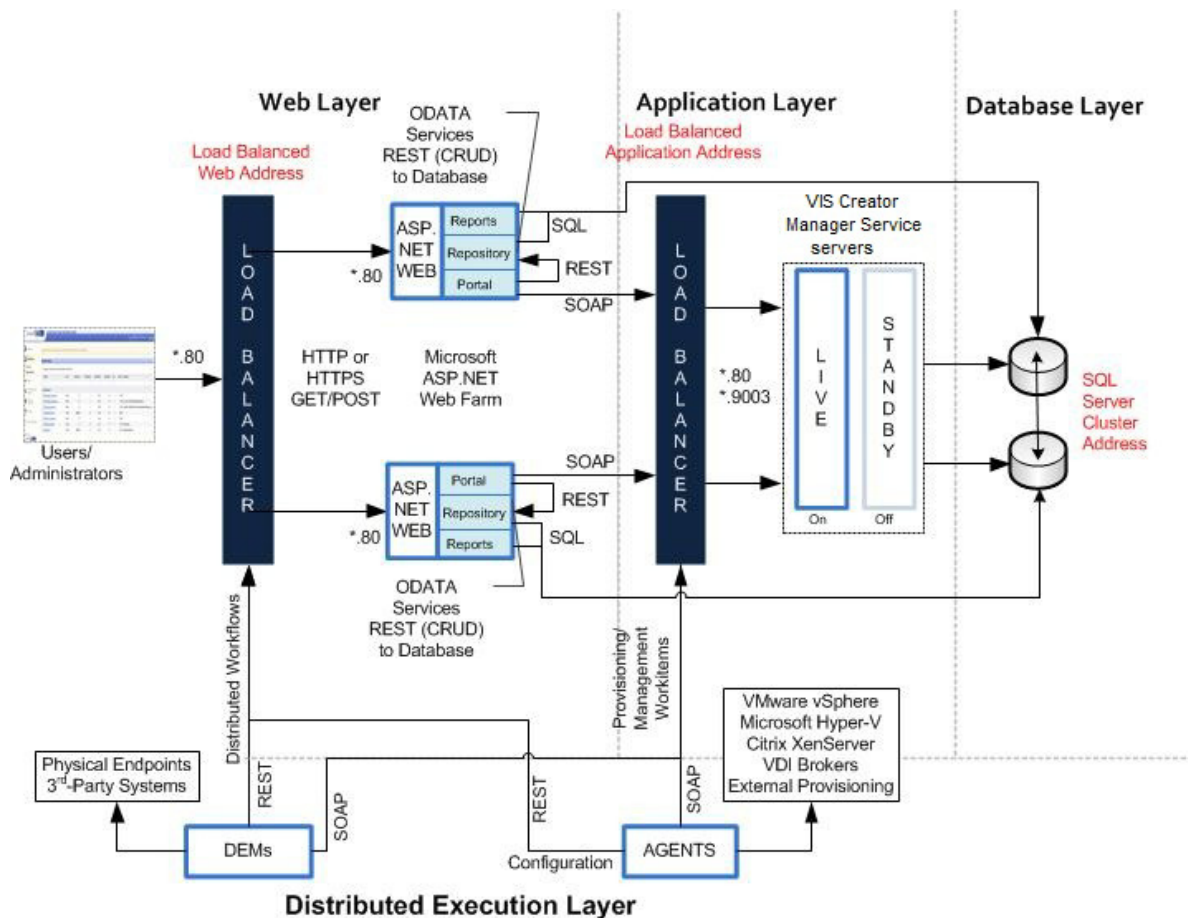

The port numbers shown in the diagram are for an HTTP deployment. In HTTPS, all communication with the web servers and the Manager Service takes place over port 443. For a full reference to TCP ports used by VIS Creator, see the *VIS Creator Installation Guide*.

VIS Creator Machines

The following table shows describes which components to install on each server profile in your deployment, along with their recommended hardware specifications.

Server Role	VIS Creator Components	Recommended Hardware Specifications
Database Server	VIS Creator Database	CPU: 2.4 GHz 4-core or equivalent RAM: 8 GB Disk: 40 GB Network: 1 GB/s
Web Server	Model Manager (Web and Data) Portal Website Reports Website	CPU: 2.4 GHz 4-core or equivalent RAM: 4 GB Disk: 40 GB Network: 1 GB/s
VIS Creator Server	Manager Service DEM Orchestrator	CPU: 2.4 GHz 4-core or equivalent RAM: 4 GB Disk: 40 GB Network: 1 GB/s
DEM Machines	(one or more) DEM Workers	CPU: 2.4 GHz 4-core or equivalent RAM: 4 GB Disk: 40 GB Network: 1 GB/s
Agent Machines	(one or more) VIS Creator Agents	CPU: 2.4 GHz 4-core or equivalent RAM: 4 GB Disk: 40 GB Network: 1 GB/s

High Availability Configuration

For high availability environments, install at least one redundant instance of each server profile above. For details, see the *VIS Creator Installation Guide*.

Load Balancer Considerations

Dell recommends deploying at least two web servers in a production environment. Single-web server deployments should be used for development and testing environments only. Use the “least response time” method for balancing traffic to the web servers.

Dell also recommends enabling session affinity (or “sticky sessions”) to direct subsequent requests from each unique session to the same web server in the load balancer pool. If you do not want to enable session affinity on the load balancer, you can configure the VIS Creator web components in Web Farm Configuration using a session state database. For details, see the *VIS Creator Installation Guide*.

A load balancer is also recommended to handle failover for the Manager Service. Because only one Manager Service is active at any one time, session affinity is not required for the Manager Service.

The load balancer can determine the availability of the VIS Creator components on each host by attempting to connect to the appropriate port, depending on the service, or making a GET request to a URL.

The following table summarizes the recommended balancing method for each server profile and how to determine the availability of the host.

Server Role	Balancing Method	Availability (HTTP)	Availability (HTTPS)
Web Server (Portal Website, Reports Website, Model Manager)	Least response time	Port 80	Port 443
VIS Creator Server (Manager Service)	Failover	Port 9003	https://<managerhost>/VMPS2

Initial Deployment Recommendations

This section describes a general deployment configuration for VIS Creator. These recommendations should be considered a starting point for deployment. After initial testing and deployment to production, you should continue to monitor performance and allocate additional resources if necessary, as described in the Scalability Considerations section below.

Database Deployment

Dell recommends that you always deploy with a dedicated database server to host the VIS Creator database.

Portal Website Configuration

The initial number of web servers depends on the expected size of your deployment and the number of machines that you plan to manage through VIS Creator.

Deployment Size	Web Server Recommendation
Small (up to 1,000 machines)	1 active web server, with 1 server for failover Note: In this configuration, the Manager Service can be cohosted with the web components.
Medium (up to 10,000 machines)	2 dedicated web servers with the Manager Service deployed separately
Large (more than 10,000 machines)	3+ dedicated web servers

Data Collection Configuration

The default data collection settings provide a good starting point for most implementations. After deployment to production, continue to monitor the performance of data collection to determine if any adjustments need to be made.

Distributed Execution Manager Configuration

In general, DEMs should be located as close to the Model Manager host as possible. The DEM Orchestrator must have strong network connectivity to the Model Manager at all times. Dell recommends that you have two DEM Orchestrator instances (one for failover) and begin with two DEM Workers (or at least one per data center location) in your implementation.

If a DEM Worker must execute a location-specific workflow, the Worker should be installed in that location. Assign skills to the relevant workflows and DEMs to ensure that those workflows are always executed by DEMs in the correct location. For information about assigning skills to workflows and DEMs using the Creator Workflow Designer console, see the *VIS Creator What's New Guide*.

For best performance, DEMs and Agents should be installed on separate machines. For additional guidance about installing VIS Creator Agents, see the *VIS Creator Installation Guide*.

Scalability Considerations

The following sections describe various performance characteristics of VIS Creator. It provides recommendations for your initial deployment based on anticipated usage and guidance for tuning performance based on actual usage over time.

Portal Website Scalability

Website latency, network traffic, and CPU usage on the web server and database server hosts increase with the number of concurrent users and the number of machines each user owns.

Performance Analysis and Tuning

In most cases, performance problems with the portal website can be alleviated by adding more web servers to the load balancer pool. In the case where the web server or database server is CPU-bound, performance can be improved by increasing the processing power of the server.

Data Collection Scalability

The time required for data collection to complete depends on several factors, including the capacity of the compute resource and the number of machines on the compute resource or endpoint, current system and network load, among other variables. The performance scales at a different rate for different kinds of data collection.

Performance Analysis and Tuning

As the amount of resources to be data collected increases, the time required to complete data collection may become longer than the interval between data collections, particularly for state data collection. You can determine whether data collection is not completing in time and being queued by checking the Data Collection page for a Compute Resource or Endpoint. If the Last Completed field always displays "In queue" or "In progress" instead of a timestamp when data collection last completed, you may need to decrease the data collection frequency (that is, increase the interval between data collections).

Alternatively, you can increase the concurrent data collection limit per agent. By default, VIS Creator limits its concurrent data collection activities to two per agent and queues requests that are over this limit. This allows data collection activities to complete quickly while not affecting overall performance. It is possible

to raise the limit to take advantage of concurrent data collection but this should be weighed against any degradation in overall performance.

If you do increase the configured VIS Creator per-agent limit, you may want to increase one or more of these execution timeout intervals. For more information about configuring data collection concurrency and timeout intervals, see the *VIS Creator User's Guide*.

Data collection is CPU-intensive for the Manager Service. Increasing the processing power of the Manager Service host can decrease the time required for data collection overall.

Data collection for Amazon EC2 in particular can be very CPU-intensive especially when running data collection on multiple regions concurrently and when data collection has not previously been run on those regions. This can cause an overall degradation in website performance. Decrease the frequency of Amazon inventory data collection if it is having a noticeable effect on performance.

Workflow Processing Scalability

Average workflow processing time (from the time that the workflow is ready to be preprocessed by the DEM Orchestrator to when it finishes executing) increases with the number of concurrent workflows. Workflow volume is a function of the amount of VIS Creator activity, including machine requests and some data collection activities.

Performance Analysis and Tuning

You can use the Distributed Execution Status page to view the total number of workflows that are in progress or pending at any time, and you can use the Workflow History page to determine how long it takes to execute a given workflow.

If you find that there is a large number of pending workflows at any one time, or that workflows are taking longer to complete, the general solution is to add more DEM Worker instances that are available to pick up workflows. Each DEM Worker can process 15 concurrent workflows; beyond this limit, workflows are queued for execution.

Additionally, you can adjust workflow schedules so as to minimize the number of workflows that are scheduled to be kicked off at the same time. For example, rather than scheduling all hourly workflows to execute at the top of the hour, you can stagger their execution so that they do not compete for DEM resources at once.

Some workflows, particularly certain custom workflows, can be very CPU-intensive. If the CPU load on the DEM Worker machines is high, consider increasing the processing power of the DEM machine or adding more DEM machines to your environment.

