




## Dell 70 Interactive Conference Room Monitor C7017T

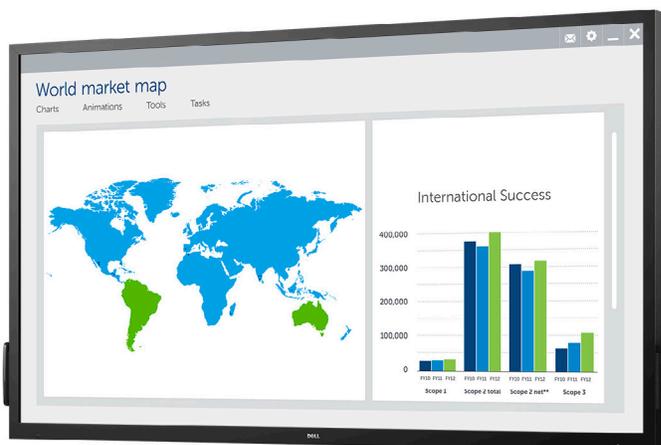

The ideal large interactive touch display for collaboration in conference rooms and classrooms.

### Enhance collaboration with this large touch display

Exchange ideas clearly on this expansive 70-inch interactive touch screen which allows you and your team to:

- Conveniently choose the interaction you like — intuitive 10-point hand touch or stylus.
- Enjoy sharp images and great screen details on the bright Full HD anti-glare screen that reduces distracting reflections.
- See fonts clearly on this display designed for viewing everyday office programs and applications.
- Experience consistent, accurate text and colors across a wide viewing angle for easier group collaboration.
- Comfortably display presentations on the ideal screen size for a conference room seating nine to twelve people.

### Easy to connect and manage

Get ready for your next meeting quickly and easily with the C7017T.

- Fast access to multiple connectivity ports including DisplayPort, USB, HDMI and VGA ports with optional wireless connectivity for added convenience.
- RS232 and RJ45 interface supports simplified remote management.
- Conveniently ships with compatible wall mount kit so the C7017T is ready to install right out of the box.

### Reliable

Choosing Dell for your conference room monitor means you'll enjoy proven technology from the makers of the #1 monitor brand worldwide.\*

- 3 years Limited Hardware Warranty<sup>1</sup> and Advanced Exchange Service<sup>2</sup>.
- Meets regulatory and environmental standards like ENERGY STAR<sup>®</sup> and RoHS.




Thank you for making Dell Monitors

**#1**  
worldwide\*

For more information visit [www.dell.com/monitors](http://www.dell.com/monitors)

Experience the brilliantly clear Dell 70 Interactive Conference Room Monitor – ideal for conference rooms seating 9 to 12 people.

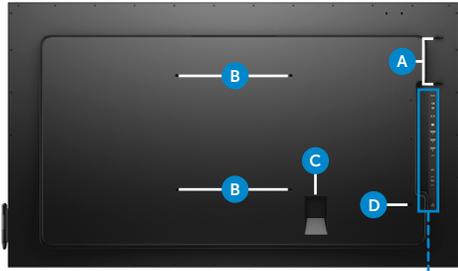

- Back view
- A Wire saddle hole
  - B VESA mounting holes (400 mm x 400 mm)
  - C AC power connector
  - D RJ-45 connector

### Connectivity



- E RS232 connector
- F Audio line-out
- G Audio line-in
- H VGA
- I DisplayPort
- J HDMI (MHL)
- K HDMI 1.4
- L USB downstream\*\* (power charging port)
- M USB downstream
- N USB upstream

What's in the box?
<b>Components</b> <ul style="list-style-type: none"> <li>• Monitor</li> <li>• Chief LSA1U Wall Mount Kit</li> <li>• Remote control and batteries (AAA x 2)</li> <li>• Remote control holder</li> <li>• Stylus x 2 and stylus holder</li> <li>• Wire saddles</li> </ul>
<b>Cables</b> <ul style="list-style-type: none"> <li>• Power cable (varies by country)</li> <li>• VGA cable</li> <li>• HDMI to HDMI cable</li> <li>• DisplayPort cable</li> <li>• USB 3.0 upstream cable (to enable the USB ports on the monitor)</li> </ul>
<b>Documentation</b> <ul style="list-style-type: none"> <li>• Drivers and documentation media (CD)</li> <li>• Quick Setup Guide</li> <li>• Safety and regulatory information</li> </ul>



\* Dell monitors are #1 Worldwide for 3 consecutive years. Source: IHS Global Inc. Desktop Monitor Market Tracker (2013 to 2015) ID#G16000073

\*\* This port supports BC 1.2 compliance charging devices, at 1.5A (power capability 2A max) for fast charging.

<sup>1</sup> For a copy of the Limited Hardware Warranty, write to Dell USA LP, Attn: Warranties, One Dell Way, Round Rock, TX 78682 or see dell.com/warranty.

<sup>2</sup> Advanced Exchange Service replacement part/unit ships, if needed, after phone/online diagnosis. Fee charged for failure to return defective unit. Availability varies. Other conditions apply.

<sup>3</sup> Color gamut (typical) is based on CIE1976 (86%) and CIE1931 (72%) test standards.

<sup>4</sup> DisplayPort 1.2 - Supports High Bit Rate 2 (HBR2) and Multi-stream transport (MST). C7017T does not support fast AUX transaction, 3D stereo transport and HBR (High bit rate) audio.

## Dell 70 Interactive Conference Room Monitor | C7017T

Display	
Model number	C7017T
Viewable image size (diagonal)	176.56 cm (69.513 inches)
Active display area	
Horizontal	1538.88 mm (60.59 inches)
Vertical	865.62 mm (34.08 inches)
Maximum resolution	Full HD 1920 x 1080 at 60 Hz
Aspect ratio	16:9
Pixel pitch	0.802 x 0.802 mm
Brightness (typical)	400 cd/m <sup>2</sup> ~ 350cd/m <sup>2</sup> effective
Color gamut (typical)	86% <sup>3</sup>
Color depth	1.07 billion
Contrast ratio (typical)	4,000:1 (typical)
Viewing angle (typical) (vertical/horizontal)	176°/176°
Response time (typical)	6 ms (gray to gray) fast mode
Panel technology	Vertical Alignment
Surface	Anti-glare
Backlight	LED
Remote control	Brightness and volume adjustment
Built-in speakers	10W x 2
Bezel color	Black

Connectivity	
Connectors	1 x VGA, 3 x HDMI (2 x HDMI 1.4, 1 x HDMI/MHL), 1 x DisplayPort 1.2 <sup>4</sup> , 4 x USB 3.0 downstream ports (including 1 power charging port**), 1 x USB 2.0 for touch, Audio line-in, Audio line-out

Design features	
Touch	IR-Technology   10 points multi touch
VESA mounting support (wall mount included)	400 mm x 400 mm

Extras	
Wall mount kit	Chief LSA1U
Accessories	Stylus x2 + Stylus holder, Remote + remote holder

Power	
AC input voltage/frequency/current (typical)	100 to 240 VAC/50 or 60 Hz ± 3 Hz/4.0 A (max)
Power consumption (normal operation)	230W Max, 145W typical; 120W (ENERGY STAR®)
Power consumption	Standby (USB and RJ45 off) <0.5W Standby (USB Touch on) < 2W Standby (USB + RJ45 connected) <4W

Dimensions	
Height	932.6 mm (36.71 inches)
Width	1593.5 mm (62.73 inches)
Depth	95.1 mm (3.74 inches)

Weight	
Bezel width	Left, right, top 25.8 mm (1.01 inches) Bottom 38.2 mm (1.50 inches)
Weight (panel only – for wall mount or VESA mount considerations – no cables)	55.5 kg (122.36 lb)
Shipping weight	78.6 kg (173.28 lb)

Environmental compliance	
	ENERGY STAR®, RoHS, CECP

Standard service plan	
	• 3 years Advanced Exchange Service <sup>2</sup> & Limited Hardware Warranty <sup>1</sup>

dell.com/monitors  
Product availability varies by country. Please contact your Dell representative for more information.