



## Dell 70 Conference Room Monitor C7016H



The ideal large monitor for business meetings in a medium sized conference room.

### Outstanding viewing experience

View everyday office programs and applications clearly in your next business meeting or group video conference on this expansive 70-inch screen which allows you and your team to:

- Read text in Office applications easily on a display designed for viewing office documents.
- See sharp images and great screen details on the bright, anti-glare screen with Full HD resolution — no need to dim the lights to see.
- Comfortably display presentations on the ideal screen size for a conference room seating up to 12 people.
- Experience consistent and accurate text and colors across a wide viewing angle for easier group collaboration.

### Easy to deploy, use and manage

Set up for your next meeting quickly and easily with the C7016H.

- Conveniently ships with compatible wall mount kit.
- Easy access to DisplayPort, USB, HDMI and VGA ports for fast set up.
- Compatible and hassle-free projection from most PCs through VGA, HDMI or DisplayPort connectivity.
- Easy manageability with the RS232 interface.

### Reliable

Choosing Dell for your conference room monitor means you'll enjoy proven technology from the makers of the #1 monitor brand worldwide.\*

- 3 years Limited Hardware Warranty<sup>1</sup> and Advanced Exchange Service<sup>2</sup>.
- Meets regulatory and environmental standards like ENERGY STAR and RoHS.




Thank you  
for making  
Dell Monitors

**#1**  
worldwide\*

For more information visit  
[www.dell.com/monitors](http://www.dell.com/monitors)

Experience the brilliantly clear Dell 70 Conference Room Monitor – ideal for small to medium sized conference rooms.

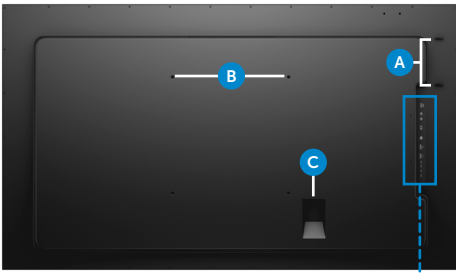

- Back view
- A Wire saddle hole
  - B VESA mounting holes (400 mm x 400 mm)
  - C AC power connector

### Connectivity



- D RS232 connector
- E Audio line-out
- F Audio line-in
- G VGA
- H DisplayPort
- I HDMI (MHL)
- J USB downstream\*\* (power charging port)
- K USB downstream
- L USB upstream

What's in the box?
<b>Components</b> <ul style="list-style-type: none"> <li>• Monitor</li> <li>• Chief RLT2 Wall Mount Kit</li> <li>• Remote control and batteries (AAA x 2)</li> <li>• Wire saddle</li> </ul>
<b>Cables</b> <ul style="list-style-type: none"> <li>• Power cable (varies by country)</li> <li>• VGA cable</li> <li>• HDMI cable</li> <li>• USB upstream cable (to enable the USB ports on the monitor)</li> </ul>
<b>Documentation</b> <ul style="list-style-type: none"> <li>• Drivers and documentation media (CD)</li> <li>• Quick Setup Guide</li> <li>• Safety and regulatory information</li> </ul>

## Dell 70 Conference Room Monitor | C7016H

Display	
Model number	C7016H
Viewable image size (diagonal)	176.56 cm (69.513 inches)
Active display area	
Horizontal	1538.88 mm (60.59 inches)
Vertical	865.62 mm (34.08 inches)
Maximum resolution	Full HD 1920 x 1080 at 60 Hz
Aspect ratio	16:9
Pixel pitch	0.802 x 0.802 mm
Brightness (typical)	400 cd/m <sup>2</sup>
Color gamut (typical)	86% <sup>3</sup>
Color depth	1.07 billion
Contrast ratio (typical)	4,000:1 (typical)
Viewing angle (typical) (vertical/horizontal)	176°/176°
Response time (typical)	6 ms (gray to gray)
Panel technology, surface	Vertical Alignment
Backlight	LED
Remote control	Brightness and volume adjustment, OSD menu control, Power, Input source selection
Built-in speakers	10W x 2
Bezel color	Black

Connectivity	
Connectors	VGA, 2 x HDMI (1.4 /MHL 2.0 combo), DisplayPort 1.2 <sup>4</sup> , 3 x USB (including 1 power charging port**), USB upstream port, Audio line-in, Audio line-out

Design features	
Security	Security lock slot (security lock not included)
VESA mounting support (wall mount included)	400 mm x 400 mm
Wall mount	RLT2 Wall Mount Kit

Power	
AC input voltage/frequency/current (typical)	100 to 240 VAC/50 or 60 Hz ± 3 Hz/4.0 A (max)
Power consumption (normal operation)	142W typical – 220W maximum
Power consumption (active-off mode)	<0.4 W

Dimensions (with stand)	
Height	920.62 mm (36.24 inches)
Width	1584.22 mm (62.37 inches)
Depth	79.1 mm (3.11 inches)

Weight	
Weight (panel only – for wall mount or VESA mount considerations – no cables)	39.0 kg (85.8 lb)
Shipping weight	58.2 kg (128.0 lb)

Environmental compliance	
	ENERGY STAR® and RoHS

Standard service plan	
	• 3 years Advanced Exchange Service <sup>2</sup> & Limited Hardware Warranty <sup>1</sup>

\* Dell monitors are #1 Worldwide for 2 consecutive years and #1 in North America for 15 consecutive years. Source: NPD DisplaySearch Quarterly Desktop Monitor Shipment and Forecast Report (2013 and 2014).

\*\*This port supports BC 1.2 compliance charging devices, at 1.5A (power capability 2A max) for fast charging.

<sup>1</sup> For a copy of the Limited Hardware Warranty, write to Dell USA LP, Attn: Warranties, One Dell Way, Round Rock, TX 78682 or see [dell.com/warranty](http://dell.com/warranty).

<sup>2</sup> Advanced Exchange Service replacement part/unit ships, if needed, after phone/online diagnosis. Fee charged for failure to return defective unit. Availability varies. Other conditions apply.

<sup>3</sup> Color gamut (typical) is based on CIE1976 (86%) and CIE1931 (72%) test standards.

<sup>4</sup> DisplayPort 1.2 - Supports High Bit Rate 2 (HBR2) and Multi-stream transport (MST). C7016H does not support fast AUX transaction, 3D stereo transport and HBR (High bit rate) audio.

