



COMMISSION REGULATIONS ErP Technical Documentations


COMMISSION REGULATION 617/2013 (ErP Lot 3)

Test parameters for measurements:

- Energy consumption is tested at 230 Volts / 50 Hz.
- total harmonic distortion of the electricity supply system,

Supply Voltage:	Europe	230 ($\pm 1\%$) Volts AC, 50 Hz ($\pm 1\%$)
	Note: For products rated for > 1.5kW Maximum power, the volt range is $\pm 4\%$.	
Total Harmonic Distortion (THD) (Voltage):	< 2% THD (<5% for products which are rated for > 1.5kW maximum power).	
Ambient Temperature:	23° C \pm 5° C	
Relative Humidity:	10 - 80 %	
Air Flow	< 0.5 m/s (meters/second)	

Information and documentation on the instrumentation, set-up and circuits used for electrical testing:

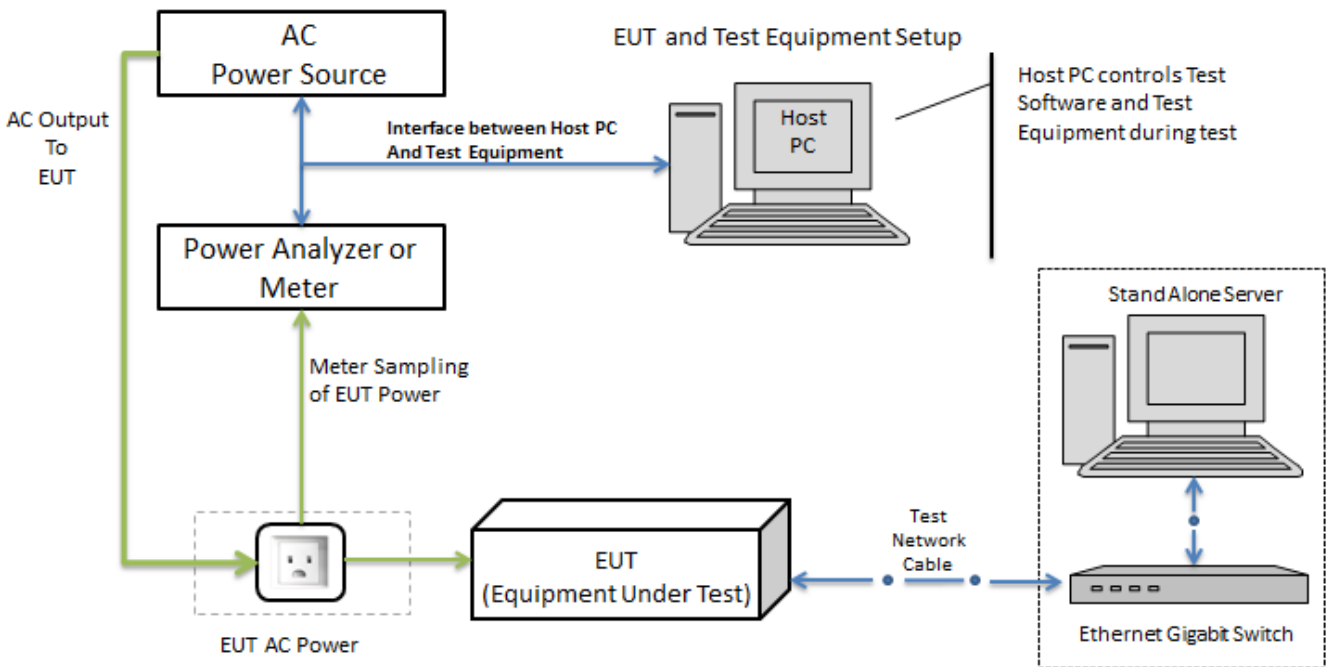



COMMISSION REGULATIONS ErP Technical Documentations

Term or Acronym	Definition
EUT (UUT)	Equipment Under Test (or Unit Under Test)
E_{TEC}	'Annual total energy consumption (E_{TEC})' is the electricity consumed by a product over specified periods of time across defined power modes and states
$E_{TEC} - Desktops$	= $(8760/1000) * (0.55*P_{off} + 0.05*P_{sleep} + 0.40*P_{idle})$.
	For computers that lack a discrete sleep mode, but have idle state power demand less than or equal to 10.00 W, power in idle state (P_{idle}) may be used in place of sleep (P_{sleep}) in the above equation, such that the formula is replaced by: $E_{TEC} = (8760/1000) * (0.55*P_{off} + 0.45*P_{idle})$
$E_{TEC} - Notebooks$	$E_{TEC} = (8760/1000) * (0.60*P_{off} + 0.10*P_{sleep} + 0.30*P_{idle})$
<i>Watts</i>	All P_x are power values in the indicated mode/state as defined in the definition section, measured in Watts (W) according to the procedures.
<i>Idle Mode Testing</i>	Unit Under Test (UUT) shall be allowed no more than 20 minutes from the point of ceased user input before measurements must be recorded.
<i>Additional Internal Storage</i>	Means any and all internal storage devices, including hard disk drives (HDD), solid state drives (SSD) and hybrid hard drives (HHD), included within a computer beyond the first
<i>Television tuner</i>	Means a discrete internal component that allows a computer to receive television signals;
<i>Audio card (sound card)</i>	Means a discrete internal component that processes input and output audio signals to and from a computer
<i>Wake event'</i>	Means a user, scheduled, or external event or stimulus that causes the computer to transition from sleep mode or off mode to an active mode of operation. Wake event includes, but is not limited to, the following events:
	<ul style="list-style-type: none"> movement of the mouse; keyboard activity; controller input; real-time clock event; a button press on the chassis; and in the case of external events, stimulus conveyed via a remote control, network or modem;
<i>Wake On LAN (WOL)</i>	Means a functionality which allows a computer to transition from sleep mode or off mode (or another similar low power mode) when directed by a network request via Ethernet;



COMMISSION REGULATIONS ErP Technical Documentations

Test Mode Measurements	
Measurements	For the purposes of compliance and verification of compliance with the applicable requirements of this Regulation, measurements and calculations are made using COMMISSION-REGULATION-617-2013-Transitional-methods & EN 62623:2013.
	Place EUT (UUT) into the Mode to be tested, and allow for stabilization period before measurement:
Idle Mode	<p>The mode where the Computer has reached an Idle condition (i.e., 15 minutes after OS boot or after completing an active workload or after resuming from Sleep Mode) and the main Computer Display has entered a low-power state where screen contents cannot be observed (i.e., backlight has been turned off) but remains in the working mode (ACPI G0/S0).</p> <p>If power management features are enabled as-shipped in the scenario described in this definition, such features shall engage prior to evaluation of Idle (e.g. display is in a low power state, HDD may have spun-down), but the Computer is prevented from entering Sleep Mode. Represents average power measured when in the idle mode.</p>
Sleep Mode	<p>Sleep Mode: Means a low power mode that a computer is capable of Entering automatically after a period of inactivity or by manual selection. In this mode the computer will respond to a wake event. Where Advanced Configuration and Power Interface (ACPI) standards are applicable, Sleep mode usually correlates to ACPI system level G1/S3 (suspend to RAM) state</p>
Standby/Off Mode	<p>Means the power demand level in the low power mode which cannot be switched off (influenced) by a user, other than through the movement of a mechanical switch, and which may persist for an indefinite period of time when the appliance is connected to the main electricity supply and used in accordance with the manufacturer's instructions. Where Advanced Configuration and Power Interface (ACPI) standards are applicable, off mode usually correlates to ACPI system level G2/S5 ('soft off') state</p>
Lowest Power State	<p>State or mode with the lowest power demand found in a computer. This state or mode may be entered or left by either a mechanical means (e.g. by turning off the computer's power through the movement of a mechanical switch) or via automatic means. (Same as Off mode with WOL "Off").</p>
Network connection	<p>The EUT (UUT) must be connected to an Ethernet network switch capable of the EUT highest and lowest network speeds. The network connection must be live during all tests.</p>
Battery Removal	<p>Notebooks and Tablets either have the battery packs removed for all tests or ensure the batteries are fully charged.</p>
Wireless Settings	<p>Power to wireless radios should be turned off for all tests. This applies to wireless network adapters (e.g. 802.11) or device-to-device wireless protocols.</p>



COMMISSION REGULATIONS ErP Technical Documentations

Power Management

You can help reduce electricity usage and its side effects by leaving the power-management features enabled and by turning off your product when it is not in use for extended periods of time.

System power-management features save energy by allowing computers to enter a very low power (sleep) mode when not in use for a specified period of time. These power-management features are activated on all computers.

The power-management features are preset to allow the computer and monitor to power down (sleep) after the following periods of inactivity:

Product Type	Operating System	Monitor	Computer
Desktops, All-In-Ones, Thin Clients, Workstations, Mobile Workstations, and Notebooks	Windows XP, Windows Vista, Windows 7, Windows 8, and Windows 8.1	5-10 minutes	15-30 minutes (except for certain thin client systems)
	Ubuntu	10 minutes	30 minutes
	Chrome	8 minutes	30 minutes

The computer and monitor can be woken from the sleep state through user interaction with the keyboard or mouse.

Wake on LAN (WOL)

Computers configured with WOL can also be woken from the sleep state by a network signal. Wake-up from sleep state is unaffected by the BIOS setting and must be enabled or disabled in the operating system. WOL works only when the computer is connected to an AC power supply and may differ based on chassis or platform.

The speed of any active 1Gb/s Ethernet network link is reduced when transitioning to sleep or off state.

Wake Management

Computers with Ethernet capability that are shipped through enterprise channels (sales channels typically used by large and medium-sized business, government, educational, or other organizations to purchase computers for use in managed client or server environments) are capable of both remote (via network) and scheduled (via real-time clock) wake events from sleep state.

Power Management energy-saving potential:

www.energystar.gov/powermanagement

Notebook & Tablet Batteries

Minimum number of loading cycles that the batteries can withstand:

All currently shipping Dell Notebook & Tablet batteries meet the **Endurance in cycles at a rate of 0,5 I_r, A (accelerated test procedure)** as defined in **section 7.6.3 of the IEC EN 61960 Edition 2.0 2011-06**. The test procedure requires that Cells are taken through **400 cycles** and the remaining capacity when the test is completed shall meet the acceptance criteria of **60%** as stated in **Table 5** of the standard.



COMMISSION REGULATIONS ErP Technical Documentations

THIS DOCUMENT IS FOR INFORMATIONAL PURPOSES ONLY, AND MAY CONTAIN TYPOGRAPHICAL ERRORS AND TECHNICAL INACCURACIES. THE CONTENT IS PROVIDED AS IS, WITHOUT EXPRESS OR IMPLIED WARRANTIES OF ANY KIND.

© 2014 Dell Inc. All rights reserved. Reproduction of this material in any manner whatsoever without the express written permission of Dell Inc. is strictly forbidden. For more information, contact Dell.

Dell, the DELL logo, and the DELL badge are trademarks of Dell Inc. Other trademarks and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Dell disclaims any proprietary interest in the marks and names of others.