
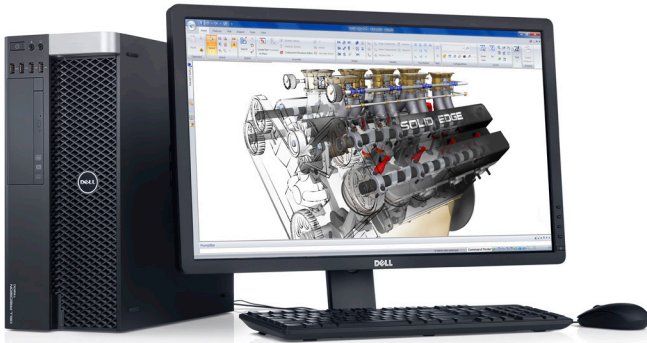


Windows®. Life without Walls™. Dell recommends Windows 7.



Screen image © 2012 Siemens Product Lifecycle Management Software Inc. Reprinted with permission. All rights reserved

Dell Precision T5600

Powerful and reliable dual socket workstation in a compact chassis

Dell Precision™ Workstations

Precision is the key element that separates greatness from everything else. Dell Precision is your key tool for crunching highly complex data sets, performing highly complex engineering work or wringing the most from any performance intensive application. Our revolutionary workstation-class products offer voracious productivity, Independent Software Vendor (ISV) certification¹, superb reliability, and harmonious manageability to maximize your productivity and dependability.

Built to work for you

The Dell Precision T5600 offers substantial compute performance for financial and scientific analysis, professional engineering and complex 3D modeling. Dell workstations are tailored to your needs and offer a wide range of configurations that are ISV certified for a broad range of professional applications, so you can rest easy knowing your professional-grade system can handle your specific workload.

Experience the evolution of productivity

Power through resource-exhausting and graphics-intensive workloads with the advanced design of the dual socket Dell Precision T5600 featuring:

- One or two processors from the Intel® Xeon® processor E5-2600 family
- Up to 128GB⁴ of quad-channel ECC memory
- Choose from a broad selection of AMD or NVIDIA® graphics
- Experience the power of NVIDIA Maximus® technology, featuring Quadro and Tesla GPUs that simultaneously enable simulation and design on a single system
- Protect your investment with Generation 3 PCIe slots to help prepare for the next generation of graphics
- Intel® Advanced Vector Extensions and Intel® Turbo Boost Technology, offering outstanding performance for complex applications

Reduce environmental impact

Dell Precision T5600 is EPEAT®-registered² and offers ENERGY STAR® 5.2 configurations, including 80 PLUS®-registered Gold power supplies. Not only will you help lower your impact on the environment, but you can also help reduce your operating energy costs.

Best-in-class chassis design

The Dell Precision T5600 features a totally redesigned chassis, enabling you to perform service and modifications with greater ease than ever before with features such as:

- Straightforward, clutter-free interior providing easy access to components
- The only mainstream tower workstation family to offer an externally accessible tool-less power supply for superior serviceability
- Integrated front and rear aluminum handles for easy deployment and moves
- Room for up to two 3.5" or four 2.5" tool-less hard drives
- Handy top tray offers a convenient location to store external drives or cameras and provides easy access to front-mounted USB ports
- Easy rack mounting via 0U rail shelf kit (sold separately)

Memory you can count on for a lifetime of dependable operation

You keep working, no matter what challenges you face. Dell's exclusive, patented Reliable Memory Technology helps ensure that your workstations will too. The new technology maximizes uptime by eliminating virtually all memory errors so the workstations can get more reliable over time, providing a stable and reliable platform you can trust.



Dell Precision T5600 Workstation Technical Specifications							
Processors	One or two; Intel® Xeon® processor E5-2600 family with up to eight cores and Intel Advanced Vector Extensions, Intel Trusted Execution Technology, Intel AES New instructions, Optimized Intel Turbo Boost and optional Intel vPro™ technology						
Operating Systems	<ul style="list-style-type: none"> • Genuine Windows® 7 Ultimate 32-Bit; Genuine Windows® 7 Ultimate 64-Bit • Genuine Windows® 7 Professional 32-Bit; Genuine Windows® 7 Professional 64-Bit • Red Hat® Enterprise Linux® WS v.6.2 EM64T (Also certified to run Red Hat Enterprise Linux Version 5.8 64-Bit) • Ubuntu 11.10 Linux (China only) 						
Chipset	Intel® C600 series						
Memory ^{2, 4}	Quad channel; Up to 128GB 1600MHz or 1333MHz ECC RDIMM memory; 8 DIMM slots (4 per processor)						
Graphics ⁴	Support for two PCI Express® x16 Gen 2 or Gen 3 graphics cards up to 300W (total for graphics): <table border="0" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 25%; vertical-align: top;">High End 3D NVIDIA® Quadro® 6000 NVIDIA Quadro K5000 NVIDIA Quadro 5000</td> <td style="width: 25%; vertical-align: top;">Mid-range 3D AMD FirePro™ W5000 NVIDIA Quadro K4000 NVIDIA Quadro 4000 NVIDIA Quadro K2000 NVIDIA Quadro 2000</td> <td style="width: 25%; vertical-align: top;">Entry 3D AMD FirePro V4900 NVIDIA Quadro K600 NVIDIA Quadro 600</td> <td style="width: 25%; vertical-align: top;">Professional 2D (not ISV certified) AMD FirePro 2270 NVIDIA Quadro NVS™ 510 NVIDIA Quadro NVS 310 NVIDIA Quadro NVS 300</td> </tr> </table>	High End 3D NVIDIA® Quadro® 6000 NVIDIA Quadro K5000 NVIDIA Quadro 5000	Mid-range 3D AMD FirePro™ W5000 NVIDIA Quadro K4000 NVIDIA Quadro 4000 NVIDIA Quadro K2000 NVIDIA Quadro 2000	Entry 3D AMD FirePro V4900 NVIDIA Quadro K600 NVIDIA Quadro 600	Professional 2D (not ISV certified) AMD FirePro 2270 NVIDIA Quadro NVS™ 510 NVIDIA Quadro NVS 310 NVIDIA Quadro NVS 300		
High End 3D NVIDIA® Quadro® 6000 NVIDIA Quadro K5000 NVIDIA Quadro 5000	Mid-range 3D AMD FirePro™ W5000 NVIDIA Quadro K4000 NVIDIA Quadro 4000 NVIDIA Quadro K2000 NVIDIA Quadro 2000	Entry 3D AMD FirePro V4900 NVIDIA Quadro K600 NVIDIA Quadro 600	Professional 2D (not ISV certified) AMD FirePro 2270 NVIDIA Quadro NVS™ 510 NVIDIA Quadro NVS 310 NVIDIA Quadro NVS 300				
GPU	NVIDIA Tesla® K20C GPGPU - Supports Nvidia Maximus™ technology						
Storage Options ⁶	Up to two 3.5" or four 2.5" internal SATA, SAS or SSD drives. Additional add-in controller required for SAS hard drives and to support 6Gb/s operation for drives that are 6.0Gb/s capable. <table border="0" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 25%; text-align: center;">SATA 7200RPM Up to 3.0TB</td> <td style="width: 25%; text-align: center;">SATA 10KRPM Up to 500GB</td> <td style="width: 25%; text-align: center;">SAS 10K RPM Up to 900GB</td> <td style="width: 25%; text-align: center;">SAS 15K RPM Up to 300GB</td> <td style="width: 25%; text-align: center;">SSD Up to 512GB</td> </tr> </table>	SATA 7200RPM Up to 3.0TB	SATA 10KRPM Up to 500GB	SAS 10K RPM Up to 900GB	SAS 15K RPM Up to 300GB	SSD Up to 512GB	
SATA 7200RPM Up to 3.0TB	SATA 10KRPM Up to 500GB	SAS 10K RPM Up to 900GB	SAS 15K RPM Up to 300GB	SSD Up to 512GB			
Storage Controller Options	<table border="0" style="width: 100%;"> <tr> <td style="width: 50%; vertical-align: top;"> Integrated: <ul style="list-style-type: none"> • Intel Storage Control Unit (SCU) SATA 3.0Gb/s controller with host based RAID 0, 1, 5, 10. OR • Dual AHCI 6Gb/s SATA port option (no RAID support) </td> <td style="width: 50%; vertical-align: top;"> Optional: <ul style="list-style-type: none"> • Dell PERC H310 PCIe host-based RAID card with four usable 6Gb/s ports supporting SATA/SAS/SSD drives and RAID 0, 1, 5, 10 configurations • Dell PERC H710P PCIe hardware RAID card with 1GB non-volatile cache memory and four usable 6Gb/s ports supporting SATA/SAS/SSD drives and RAID 0, 1, 5, 10 configurations </td> </tr> </table>	Integrated: <ul style="list-style-type: none"> • Intel Storage Control Unit (SCU) SATA 3.0Gb/s controller with host based RAID 0, 1, 5, 10. OR • Dual AHCI 6Gb/s SATA port option (no RAID support) 	Optional: <ul style="list-style-type: none"> • Dell PERC H310 PCIe host-based RAID card with four usable 6Gb/s ports supporting SATA/SAS/SSD drives and RAID 0, 1, 5, 10 configurations • Dell PERC H710P PCIe hardware RAID card with 1GB non-volatile cache memory and four usable 6Gb/s ports supporting SATA/SAS/SSD drives and RAID 0, 1, 5, 10 configurations 				
Integrated: <ul style="list-style-type: none"> • Intel Storage Control Unit (SCU) SATA 3.0Gb/s controller with host based RAID 0, 1, 5, 10. OR • Dual AHCI 6Gb/s SATA port option (no RAID support) 	Optional: <ul style="list-style-type: none"> • Dell PERC H310 PCIe host-based RAID card with four usable 6Gb/s ports supporting SATA/SAS/SSD drives and RAID 0, 1, 5, 10 configurations • Dell PERC H710P PCIe hardware RAID card with 1GB non-volatile cache memory and four usable 6Gb/s ports supporting SATA/SAS/SSD drives and RAID 0, 1, 5, 10 configurations 						
Communications	<table border="0" style="width: 100%;"> <tr> <td style="width: 50%; vertical-align: top;"> Integrated: <ul style="list-style-type: none"> • Intel 82579 Gigabit Ethernet controller with Remote Wake UP, PXE and Jumbo frames support </td> <td style="width: 50%; vertical-align: top;"> Optional: <ul style="list-style-type: none"> • Intel Ethernet Server Adapter X520-T2 10GbE (PCIe card) • Broadcom NetXtreme 10/100/1000 Gigabit Ethernet controller (PCIe card) </td> </tr> </table>	Integrated: <ul style="list-style-type: none"> • Intel 82579 Gigabit Ethernet controller with Remote Wake UP, PXE and Jumbo frames support 	Optional: <ul style="list-style-type: none"> • Intel Ethernet Server Adapter X520-T2 10GbE (PCIe card) • Broadcom NetXtreme 10/100/1000 Gigabit Ethernet controller (PCIe card) 				
Integrated: <ul style="list-style-type: none"> • Intel 82579 Gigabit Ethernet controller with Remote Wake UP, PXE and Jumbo frames support 	Optional: <ul style="list-style-type: none"> • Intel Ethernet Server Adapter X520-T2 10GbE (PCIe card) • Broadcom NetXtreme 10/100/1000 Gigabit Ethernet controller (PCIe card) 						
Audio Controller	Integrated Realtek ALC269Q High Definition Audio						
I/O Ports	<table border="0" style="width: 100%;"> <tr> <td style="width: 33%; text-align: center;">Front</td> <td style="width: 33%; text-align: center;">Internal</td> <td style="width: 33%; text-align: center;">Rear</td> </tr> <tr> <td style="vertical-align: top;"> 3 - USB 2.0 1 - USB 3.0 1 - Microphone 1 - Headphone </td> <td style="vertical-align: top;"> 3 - USB 2.0 2 - SATA 6.0Gb/s </td> <td style="vertical-align: top;"> 5 - USB 2.0 1 - USB 3.0 2 - PS2 1 - Serial 1 - RJ45 1 - 1394a (optional via add-in card) </td> </tr> </table>	Front	Internal	Rear	3 - USB 2.0 1 - USB 3.0 1 - Microphone 1 - Headphone	3 - USB 2.0 2 - SATA 6.0Gb/s	5 - USB 2.0 1 - USB 3.0 2 - PS2 1 - Serial 1 - RJ45 1 - 1394a (optional via add-in card)
Front	Internal	Rear					
3 - USB 2.0 1 - USB 3.0 1 - Microphone 1 - Headphone	3 - USB 2.0 2 - SATA 6.0Gb/s	5 - USB 2.0 1 - USB 3.0 2 - PS2 1 - Serial 1 - RJ45 1 - 1394a (optional via add-in card)					
Mid-Tower Chassis	<table border="0" style="width: 100%;"> <tr> <td style="width: 60%; vertical-align: top;"> Dimensions (HxWxD): 16.30 x 6.79 x 18.54"; 414 x 172.6 x 471mm Slots (five full length, one half length): Two PCIe x16 Gen 3; one PCIe x16 Gen 3 wired x4 (half length); one PCIe x16 Gen 2 wired x4; one PCIe x1 Gen 2; One PCI 32bit/33MHz </td> <td style="width: 40%; vertical-align: top;"> Bays: One external slimline optical bay; Two internal 3.5" hard drive bays; one external 5.25" bay; Power Supply (externally accessible, toolless, 80 Plus® Gold Certified, 90% efficient): 825W or 635W </td> </tr> </table>	Dimensions (HxWxD): 16.30 x 6.79 x 18.54"; 414 x 172.6 x 471mm Slots (five full length, one half length): Two PCIe x16 Gen 3; one PCIe x16 Gen 3 wired x4 (half length); one PCIe x16 Gen 2 wired x4; one PCIe x1 Gen 2; One PCI 32bit/33MHz	Bays: One external slimline optical bay; Two internal 3.5" hard drive bays; one external 5.25" bay; Power Supply (externally accessible, toolless, 80 Plus® Gold Certified, 90% efficient): 825W or 635W				
Dimensions (HxWxD): 16.30 x 6.79 x 18.54"; 414 x 172.6 x 471mm Slots (five full length, one half length): Two PCIe x16 Gen 3; one PCIe x16 Gen 3 wired x4 (half length); one PCIe x16 Gen 2 wired x4; one PCIe x1 Gen 2; One PCI 32bit/33MHz	Bays: One external slimline optical bay; Two internal 3.5" hard drive bays; one external 5.25" bay; Power Supply (externally accessible, toolless, 80 Plus® Gold Certified, 90% efficient): 825W or 635W						
Monitor Compatibility	Recommended with high-performance Dell UltraSharp™ widescreen displays from 22" to 30" viewable. Also compatible with Dell Professional and E Series widescreen & standard displays from 17" to 24" viewable; analog flat-panel displays also available						
Keyboard	Dell Entry keyboard; or optional Dell KB522 Wired Business Multimedia Keyboard (good); Dell NY606 SmartCard USB Keyboard (better); Logitech MK710 Wireless Keyboard and Mouse Combo (best)						
Mouse	Dell USB Optical Mouse or optional Dell WM311 3-Button Wireless Mouse (good); Microsoft Corporation U5K-00001 Explorer Touch Mouse – Black (better); Logitech 910-001105 MX Performance Wireless Mouse (best).						
Speakers	Optional Speakers: Internal speaker; Dell soundbar; two- and three-piece stereo system						
Storage Devices	Slimline options: 16.30 x 6.79 x 18.54"; 414 x 172.6 x 471mm Optional 5.25" device: DVD+/-RW, 19-in-1 media reader						
Security	Trusted Platform Module 1.2 (TPM 1.2) ⁷ ; Optional intrusion switch; Setup/BIOS Password; I/O Interface Security; Kensington® lock slot, Padlock ring, lockable power supply; Dell Data Protection Encryption solution ⁷						
Environmental and Regulatory	Energy Star® 5.2 configurations available including 80 PLUS® registered Gold power supplies; EPEAT® registered (see epeat.net for specific registration rating/status by country); China CECF; GS Mark. For a complete listing of declarations and certifications, see Dell's regulatory and compliance homepage at dell.com/regulatory_compliance						
Service and Support	3-Year Limited Hardware Warranty ⁸ and 3-year NBD On-Site Service after Remote Diagnosis ⁹ Optional: Dell ProSupport ¹⁰ is designed to rapidly respond to your business's needs, help protect your investment and sensitive data, and provide enhanced proactive support services to help reduce risk and complexity within your IT environment						

Learn more at dell.com/precision

1. ISV certification applies to select configurations.

2. A 64-bit operating system is required to support 4GB or more of system memory.

3. See epeat.net for specific registration rating/status by country.

4. GB means 1 billion bytes and TB equals 1 trillion bytes; significant system memory may be used to support graphics, depending on system memory size and other factors.

5. Supports NVIDIA SLI™

6. GB means 1 billion bytes and TB equals 1 trillion bytes; actual capacity varies with preloaded material and operating environment and will be less.

7. Available in select regions.

8. For copy of Ltd Hardware Warranty, write Dell USA LP, Attn: Warranties, One Dell Way, Round Rock, TX 78682 or see www.dell.com/warranty

9. Remote Diagnosis is determination by online/phone technician of cause of issue; may involve customer access to inside of system and multiple or extended sessions. If issue is covered by Limited Hardware Warranty and not resolved remotely, technician and/or part will be dispatched, usually within 1 business day following completion of Remote Diagnosis. Availability varies. Other conditions apply.

10. Availability and terms of Dell Services vary by region. For more information, visit www.dell.com/servicesdescriptions.

Dell PCs use Genuine Microsoft Windows, Intel, the Intel logo, Xeon and Xeon Inside are trademarks or registered trademarks of Intel Corporation in the U.S. and other countries. Microsoft, Windows and Windows Vista are trademarks or registered trademarks of Microsoft Corporation in the U.S. and other countries. Dell is a trademark of Dell Inc. ©2013 Dell Inc. All rights reserved.

